

Check Valve **DF-X63**



BEYOK
百悦康☆☆☆☆

Construction Material: PC body+Viton diaphragm+Spring

Maximum Pressure: 100 Kpa (14.5 PSI)

Crack Pressures: 3 Kpa (0.4 PSI)

Air Inlet OD: 0.24-in (6 mm)

Air Outlet OD: 0.24-in (6 mm)

Dimension: $\Phi 0.7'' \times 1.5''$ ($\Phi 18 \times 38$ mm)

Net Weight: 0.006-lb (2.5 g)


The ozone check valves are an important component in preventing damage to the ozone generator. BEYOK ozone valve assemblies are designed to be used in conjunction with the ozone generators to avoid back flow.

Features:

- Ozone resistant materials
- Small size
- Inexpensive & quick installation
-

Size View:

Unit: mm [inch]

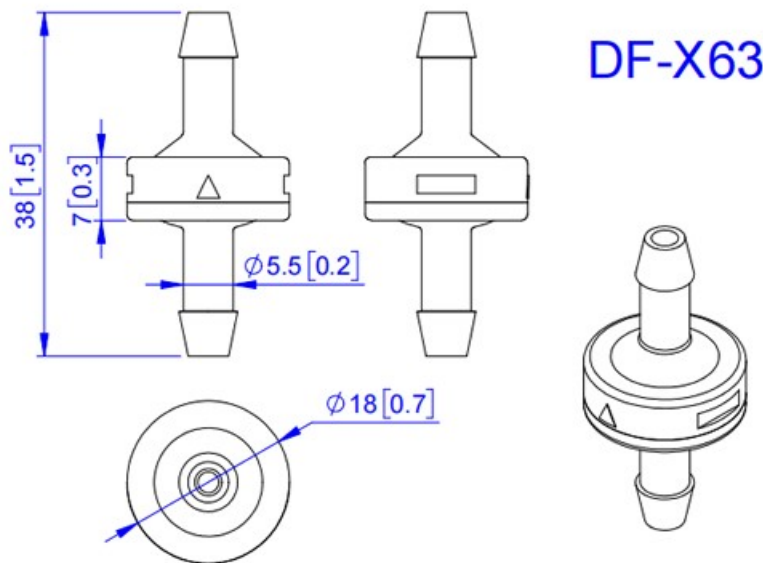

BEYOK.com