


Ozone Generator Cell **FQM-G10A**

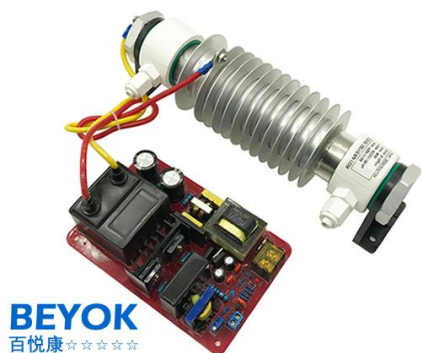

BEYOK
百悦康☆☆☆☆

Ozone Output:	3-5g/hr@15LpmAir; 7-10g/hr@3Lpm O2
Generating Method:	Corona Discharge
Electrical:	AC220V-AC110V, MAX 100W
Output Connection:	3/8-inch Plastic joint
Accessory:	Hose +Air stone (Optional)
Cooling fan:	1-2m3/min
Ozone Control:	50-100% Variable
Dimension(LxWxH):	9.4"*3.7"*2.6"(240*93*65mm); 5.5"*3.6"*1.6"(140*92*40 mm)
Installation Dim.(LxW):	7.7"*1.2"(196*30mm); 5.1"*3.2"(129*81 mm)
Net Weight:	- kg

The FQM-G series of BEYOK ozone generator cells with ceramic discharge body have good cooling condition, they can provide stable and efficient ozone output, easy to install, operate and maintain.

Features:

- Long working life
- Good cooling condition
- Stable & efficient ozone output
- External dry air or O2 source
- The core module of mini ozone generator

Benefits:

- High efficient broad-spectrum sterilization
- Good dispersion
- Without ozone residual and secondary pollution

Application:

- Mini air purification and disinfection equipment: medical equipment, incubator, air curtain, air condition, exhaust duct, workshop, hospital
- Mini water treatment equipment: swimming pool, landscape pool, waste yard

Size View:

