

### Wall Mounted Air Purifier **GQA-V20G**



BEYOK  
OZONE OZONE

Ozone Output:	20 g/hr @ Air
Ozone Generating Method:	Corona Discharge
Electrical:	220V/50Hz-120V/60Hz, 240W
Air volume:	6 m3/min
Control:	Programmable electronic loop controller
Accessory:	Outer loop timer (optional)
Application Range:	300-400 m3
Case:	Stainless steel
Dimension(LxWxH):	23.6" *12.6"*7.1" (600*320*180 mm)
Net Weight:	- kg

The GQA-V-G series of BEYOK wall mounted air purifiers use tabular modules of high performance with built-in fans, can destroy bacteria, purify air and eliminate peculiar smell in fixed time automatically. They are suitable for food factory assembly lines, restaurants, and refrigerated storage, etc.

#### Features:

- Wall mounted
- Simple operation
- Can connect an external timer
- Strong ventilation
- Good dispersion
- Low cost
- Easy to maintain

#### Benefits:


- High efficient broad-spectrum sterilization
- Good dispersion
- Without ozone residual and secondary pollution

#### Application:

- Sterilization and disinfection: restaurant, hospital, packing workshop, food factory.
- Food fresh keeping: refrigerated storage.
- Deodorization: basement, garage, store room, hotel.

#### Size View:

Unit: mm [ inch ]

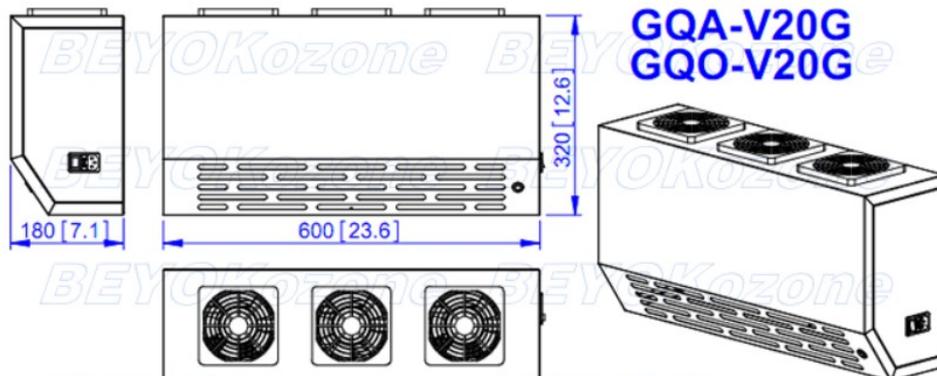

BEYOK  
OZONE OZONE