


Desktop Ozone Generator **GQO-D04**

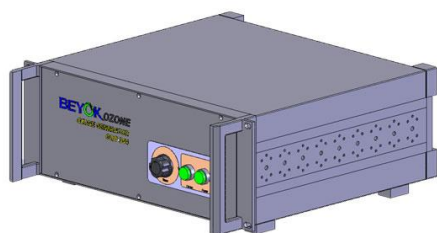

BEYOK
OZONE

Ozone Output:	2-4 g/hr@15Lpm Air
Ozone Generating Method:	Corona Discharge
Electrical:	220V/50Hz-120V/60Hz, 120W
Pump Output:	10-15 L/min, 20KPa
Control:	0 ~ 30min Timer
Cooling Method:	Air cooled
Inlet & Outlet Connection:	0.3"x0.2"(7x4mm)Stainless steel& Hose
Case:	Plastic coated Aluminum
Dimension(LxWxH):	13.5" *11.9" *5.2" (342*303*132 mm)
Net Weight:	14.3 lbs(6.5 kg)

The GQO-D series of BEYOK desktop ozone generators designed separate ozone generating units can be multilayer placed to increase the ozone output. Connect to the external oxygen source will provide a higher production of ozone.

Features:

- Portable
- Compact design with built-in air pump
- Simple operation
- High efficiency
- Work continuously
- Easy to maintain
- Long working life

Benefits:

- High efficient broad-spectrum sterilization
- Good dispersion
- Without ozone residual and secondary pollution

Application:

- Sterilization and disinfection: restaurant, hospital, packing workshop, food factory.
- Food fresh keeping: refrigerated storage.
- Deodorization: basement, garage, store room, hotel.

Size View:

