


Large Oxygen Source Ozone Generator **KQO-O-20K**

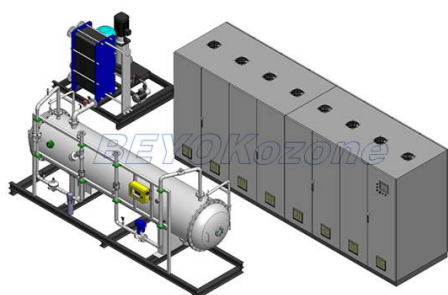

BEYOK
OZONE COZONE

| | |
|-----------------------|--|
| Ozone Output: | 20kg/h @ dry oxygen enriched air |
| Electrical: | 380V/50Hz, 140KW |
| Input air source: | External oxygen enriched system, 150Nm ³ /h |
| Cooling Water: | External Cooling Water, 40 T/h |
| Control: | Ozone can be adjusted (PLC controller) |
| Air Inlet & Outlet: | DN50 Stainless Steel Flange |
| Water Inlet & Outlet: | DN65 PVC Pipe Flange |
| Main Materials: | Stainless steel Chamber |
| Dimension(LxWxH): | 197" *14" *83" (5000*3400*2100 mm) |
| Net Weight: | - kg |

The KQO-O-K series is the mainframe of BEYOK large-sized oxygen enriched source ozone generators system. They adopt oxygen enriched source method and offer oxygen enriched source for ozone discharge chamber through Air compressor-Freezer-drier-water filter-Adsorption dryer-making oxygen. They have external cooling water system and PLC controller (optional). They are suitable for large food processing plants, pharmaceutical workshop, swimming pool, sewage treatment, etc.

Features:

- Floor stand
- Compact design
- Simple operation
- High efficiency
- Easy to maintain
- Long working life
- PLC controller (optional)


Benefits:

- High efficient broad-spectrum sterilization
- Good dispersion
- Without ozone residual and secondary pollution

Application:

- Sterilization and disinfection: food processing plants, pharmaceutical workshop, etc.
- Water treating: drinking water, swimming pool water, etc.
- Industrial water treating: industrial waste water.

Size View:

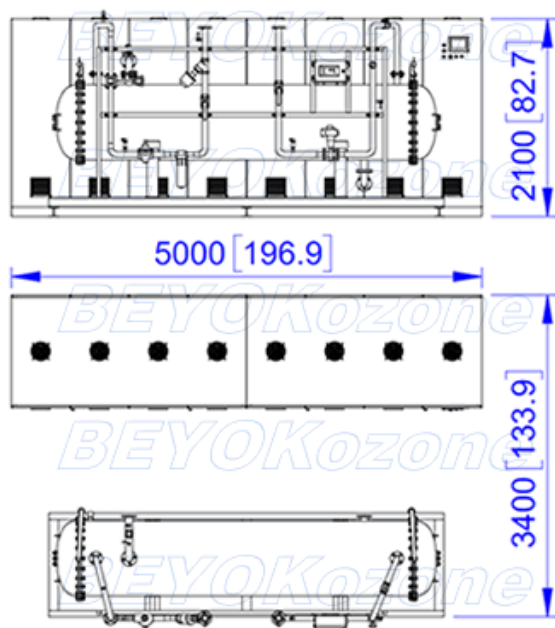

KQO-O-20K

